


Vision is
our mission®

Camera PTZ NTSC Alu
Article no. 0506962
2019 • DS0961341 EN A 04




Product Data

Dimensions

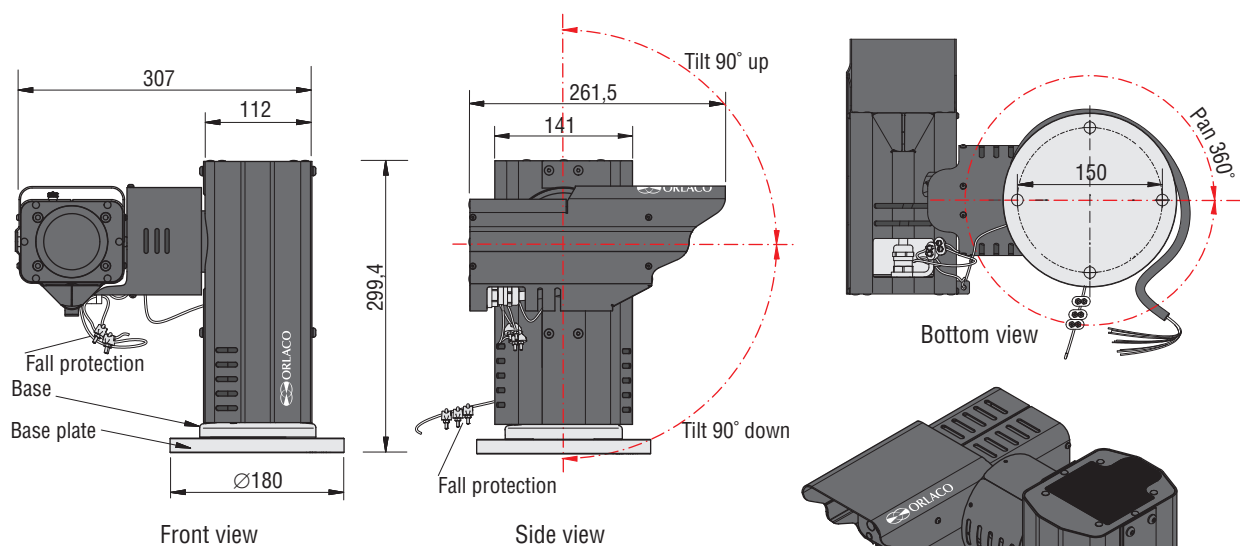

Units in mm

Cable length 5m
3,5m available for installation
Cable Base 9B-1CD-11W
Art. no. 1221300

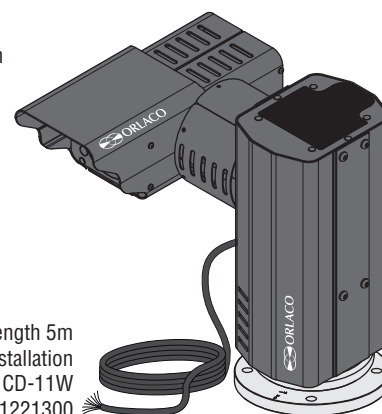

TECHNICAL DATA

Camera PTZ NTSC Alu

Article numbers **Description**
0506962 Camera PTZ NTSC Alu

General

Pan Tilt unit including zoom camera. The PTZ unit functions via two industrial stepping motors. These stepping motors are controlled by the integrated micro-controller and input commands Visca-, Pelco-D protocol (RS232 or RS485).

Zoom camera

Image sensor 2.4 MPixel 1/3" CMOS sensor.
Total pixels 1956 (H) x 1266 (V).
Hor. Resolution >700 TV lines (NTSC).
Lens 30x optical zoom, f = 4,3 mm to 129 mm, F1.6 (WIDE) to F4.8 (TELE). 32x digital zoom.
High zoom ratio up to 53x when used in NTSC mode (1.9x digital zoom will not influence image quality. Sensor itself is ±4x the number of pixels needed to create NTSC output).
Angle of view (H) 58.9° (wide) 2,11° (tele).
Minimum illumination Color: 0.5 lux (1/30sec).
0-Lux mode 0.125 lux (1/7.5sec).

Pan & Tilt

Pan angle Total 360°, 180° left, 180° right.
Tilt angle Total 180°, 90° up, 90° down from horizontal.
Backlash PTZ 1°.
Pan & Tilt speed 12,5°/sec.
Presets 128 presets Visca and 255 presets Pelco-D.
Controls The PTZ camera can be controlled by means of the Monitor 7" RLED Serial; article no. 0208232 or the Monitor 12" Serial; article no. 0207910.

General

Housing Anodised aluminium housing corrosion proof according IEC 60068-2-52 salt mist, cyclic. 1,4 Bar overpressure filled with dry nitrogen, long term stability 0,1%/year.
Weight With package; 13,2 kg, including 5m. cable.
Cable Length 5m, 3,5m available for installation, Cable Base 9B-1CD-11W, Art. no. 1221300.
Ingress protection IP68 according to IEC 60529, Dust tight and protected against the effects of immersion in water up to 10m for 30 minutes and IP69K according to DIN 40050-9, camera can withstand a high pressure cleaning with water: 14-16L/min 80°C and 100 Bars flow.
Operating temperature -40°C to +85°C. Puls width modulated thermostatically heating integrated.
Power input 18...30V/DC or alternatively 100...240V/AC via SmartBoard.
Power consumption Pan & Tilt; Heating on; 12W, heating off; 8,4W (Automatic heating).
Communication Communication via serial interface; Visca-, Pelco-D protocol (RS232 or RS485) 9,6 Kbps, 8 bit, 1 stop bit, no parity.
Included Steel cable fall protection.
Installation See installation manual IM0973143.

Certification

Green Passport All materials are compliant to Green Passport requirements according IMO resolution MEPC.197(62) as adopted on 15 July 2011 (Maritime sector:International Maritime Organization concerning the functions of the Marine Environment Protection Committee).

Electrical connections

Cable Base, Art no 1221300

| | RS232 | RS485 | |
|--------------------|--------------------|----------------|----------------|
| 1 = Coax core | Video | Video | |
| 2 = Coax shielding | Video GND | Video GND | |
| 3 = Red | Camera power | Camera power | |
| 4 = Black | Camera 0V | Camera 0V | |
| 5 = Red/White | Pan/Tilt power | Pan/Tilt power | 1 = Red/blue |
| 6 = Black/White | Pan/Tilt 0V | Pan/Tilt 0V | 2 = Black/blue |
| 7 = Green | Serial 1 RS-232 TX | B (inv) | 3 = Blue |
| 8 = Grey | Serial 2 RS-232 RX | A (non-inv) | 4 = Brown |
| 9 = Black/Gray | Serial 0V | | 5 = Shielding |
| | | | N.C. |
| | | | N.C. |
| | | | N.C. |
| | | | N.C. |
| | | | N.C. |

Cut off at wire entry
(In Junction box)

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

